



IMPLEMENT — TIRES



VREDESTEIN
TIRES



SOIL PRESERVATION ALWAYS

FLOTATION TRAC EXPLAINED

THE PROVEN CONCEPT OF THE VREDESTEIN TRAXION TIRES APPLIED IN A FLOTATION TIRE

Vredestein tires provide the lowest total cost of ownership. The Flotation Trac excels in a low rolling resistance on the road and in the field, as well as in preserving your soil.

- Open shoulder profiling
- Stable central section

BENEFITS TRACTION ZONE

Transverse lugs and open space between lugs leading to:

- continues rolling, even in the most difficult conditions
- excellent side grip for stable driving behavior on slopes



VREDESTEIN
TIRES


VREDESTEIN FLOTATION TIRES ARE DESIGNED WITH A FOCUS ON AN OPTIMAL FOOTPRINT FOR SOIL PRESERVATION

The optimal footprint consists of:

- Maximum width of the contact area
- Maximum length of the contact area
- Even pressure distribution within the contact area

The Vredestein Flotation Trac features a large, wide contact surface to ensure that the tire stays above ground with low rolling resistance, reducing rutting and decreasing fuel consumption.

The even, low pressure in the contact surface of the Vredestein Flotation Trac reduces soil compaction in comparison with competitor tires, enabling higher yields.

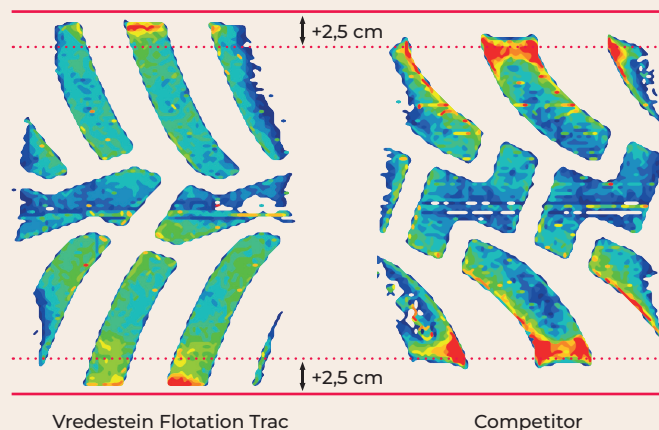

Vredestein Flotation Trac vs. competitor*	
Width of contact surface	+ 5 cm
Area of contact surface on soft soil	+ 108 cm ²
Average pressure on contact surface on soft soil	- 4,6 %

* Comparison performed on size 650/55 R 26.5 IMP at 2.0 bar and under a load of 5260 kg. Comparable results occur in other tire sizes. Measurements and calculations performed by the Vredestein test centre in Enschede (NL).

BENEFITS COMFORT ZONE

Stable central section with rubber in driving direction leading to:

- stable driving behaviour on the road
- long tire life

NON-PARALLEL LUGS

Unique non-parallel lugs with increasing gap from the centre to the shoulder, to easily push out the soil. This enhanced self-cleaning ensures the tire keeps the traction, which leads to optimum productivity.



THE ALL ROUND FLOTATION TIRE FOR MAXIMUM SOIL PROTECTION



FLOTATION TRAC

FEATURES

- Stable central tread and rounded shoulders
- Highly flexible carcass & sturdy belt design
- Robust bead construction


BENEFITS

- Keeps rolling even in the most difficult conditions
- Optimized footprint under varying inflation pressures
- High degree of reliability

VREDESTEIN
TIRES

Ø	NEW!	Service description	bar	mm		mm		mm	
				mm	mm	mm	mm		
17	480/45 R 17 IMP	TL	140 D	4,0	16.00	480	850	395	2635
	520/50 R 17 IMP	TL	141 D	3,2	16.00	505	965	445	2970
	520/50 R 17 IMP	TL	147 D	4,0	16.00	505	965	445	2970
22,5	500/45 R 22.5 IMP	TL	136 D	2,8	AG 16.00	500	1025	475	3130
	520/55 R 22.5 IMP	TL	148 D	3,2	AG 16.00	515	1155	530	3560
	520/55 R 22.5 IMP	TL	154 D	4,0	AG 16.00	515	1155	530	3560
	560/45 R 22.5 IMP	TL	152 D	4,0	AG 16.00	545	1085	490	3295
	560/45 R 22.5 IMP	TL	160 D	6,0	AG 16.00	545	1085	490	3295
	560/60 R 22.5 IMP	TL	161 D	4,0	AG 16.00	550	1245		3820
	560/60 R 22.5 IMP	TL	165 D	5,0	AG 16.00	550	1245	560	3820
	580/65 R 22.5 IMP	TL	166 D	4,0	AG 18.00	585	1300	585	3985
	600/50 R 22.5 IMP	TL	159 D	4,0	AG 20.00	600	1170	530	3615
	650/40 R 22.5 IMP	TL	150 D	3,2	AG 20.00	635	1080	495	3360
	650/40 R 22.5 IMP	TL	156 D	4,0	AG 20.00	635	1080	495	3360
	680/50 R 22.5 IMP	TL	157 D	2,8	AG 20.00	670	1260	565	3880
	680/50 R 22.5 IMP	TL	166 D	4,0	AG 20.00	670	1260	565	3880
	710/40 R 22.5 IMP	TL	161 D	4,0	AG 24.00	700	1140	515	3470
	710/45 R 22.5 IMP	TL	165 D	4,0	AG 24.00	730	1230	570	3780
800/40 R 22.5 IMP	TL	168 D	4,0	AG 28.00	790	1220	550	3700	
26	710/65 R 26 IMP	TL	179 D	4,0	DW 25B	735	1565	715	4855
26,5	600/55 R 26.5 IMP	TL	165 D	4,0	AG 20.00	620	1350	625	4170
	650/55 R 26.5 IMP	TL	169 D	4,0	AG 20.00	650	1400	635	4300
	650/65 R 26.5 IMP	TL	174 D	4,0	AG 20.00	660	1520	700	4680
	710/50 R 26.5 IMP	TL	170 D	4,0	AG 24.00	725	1380	635	4265
	750/45 R 26.5 IMP	TL	170 D	4,0	AG 24.00	740	1365	620	4180
	800/45 R 26.5 IMP	TL	174 D	4,0	AG 28.00	800	1380	640	4300
30,5	600/60 R 30.5 IMP	TL	169 D	4,0	AG 20.00	610	1505	710	4675
	650/65 R 30.5 IMP	TL	176 D	4,0	AG 20.00	645	1635	755	5075
	710/50 R 30.5 IMP	TL	173 D	4,0	AG 24.00	730	1495	680	4530
	750/60 R 30.5 IMP	TL	181 D	4,0	AG 24.00	785	1675	775	5075
	800/45 R 30.5 IMP	TL	176 D	4,0	AG 28.00	810	1510	700	4710
	850/50 R 30.5 IMP	TL	182 D	4,0	AG 28.00	870	1655	725	4910
32	800/60 R 32 IMP	TL	185 D	4,0	DW 27B	810	1795	810	5550
	900/65 R 32 IMP	TL	188 D	3,2	DW 30B	915	1955	875	5965
38	900/65 R 38 IMP	TL	191 D	3,2	DW 30B	905	2110	940	6400

· The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.
· Subject to changes in specifications.

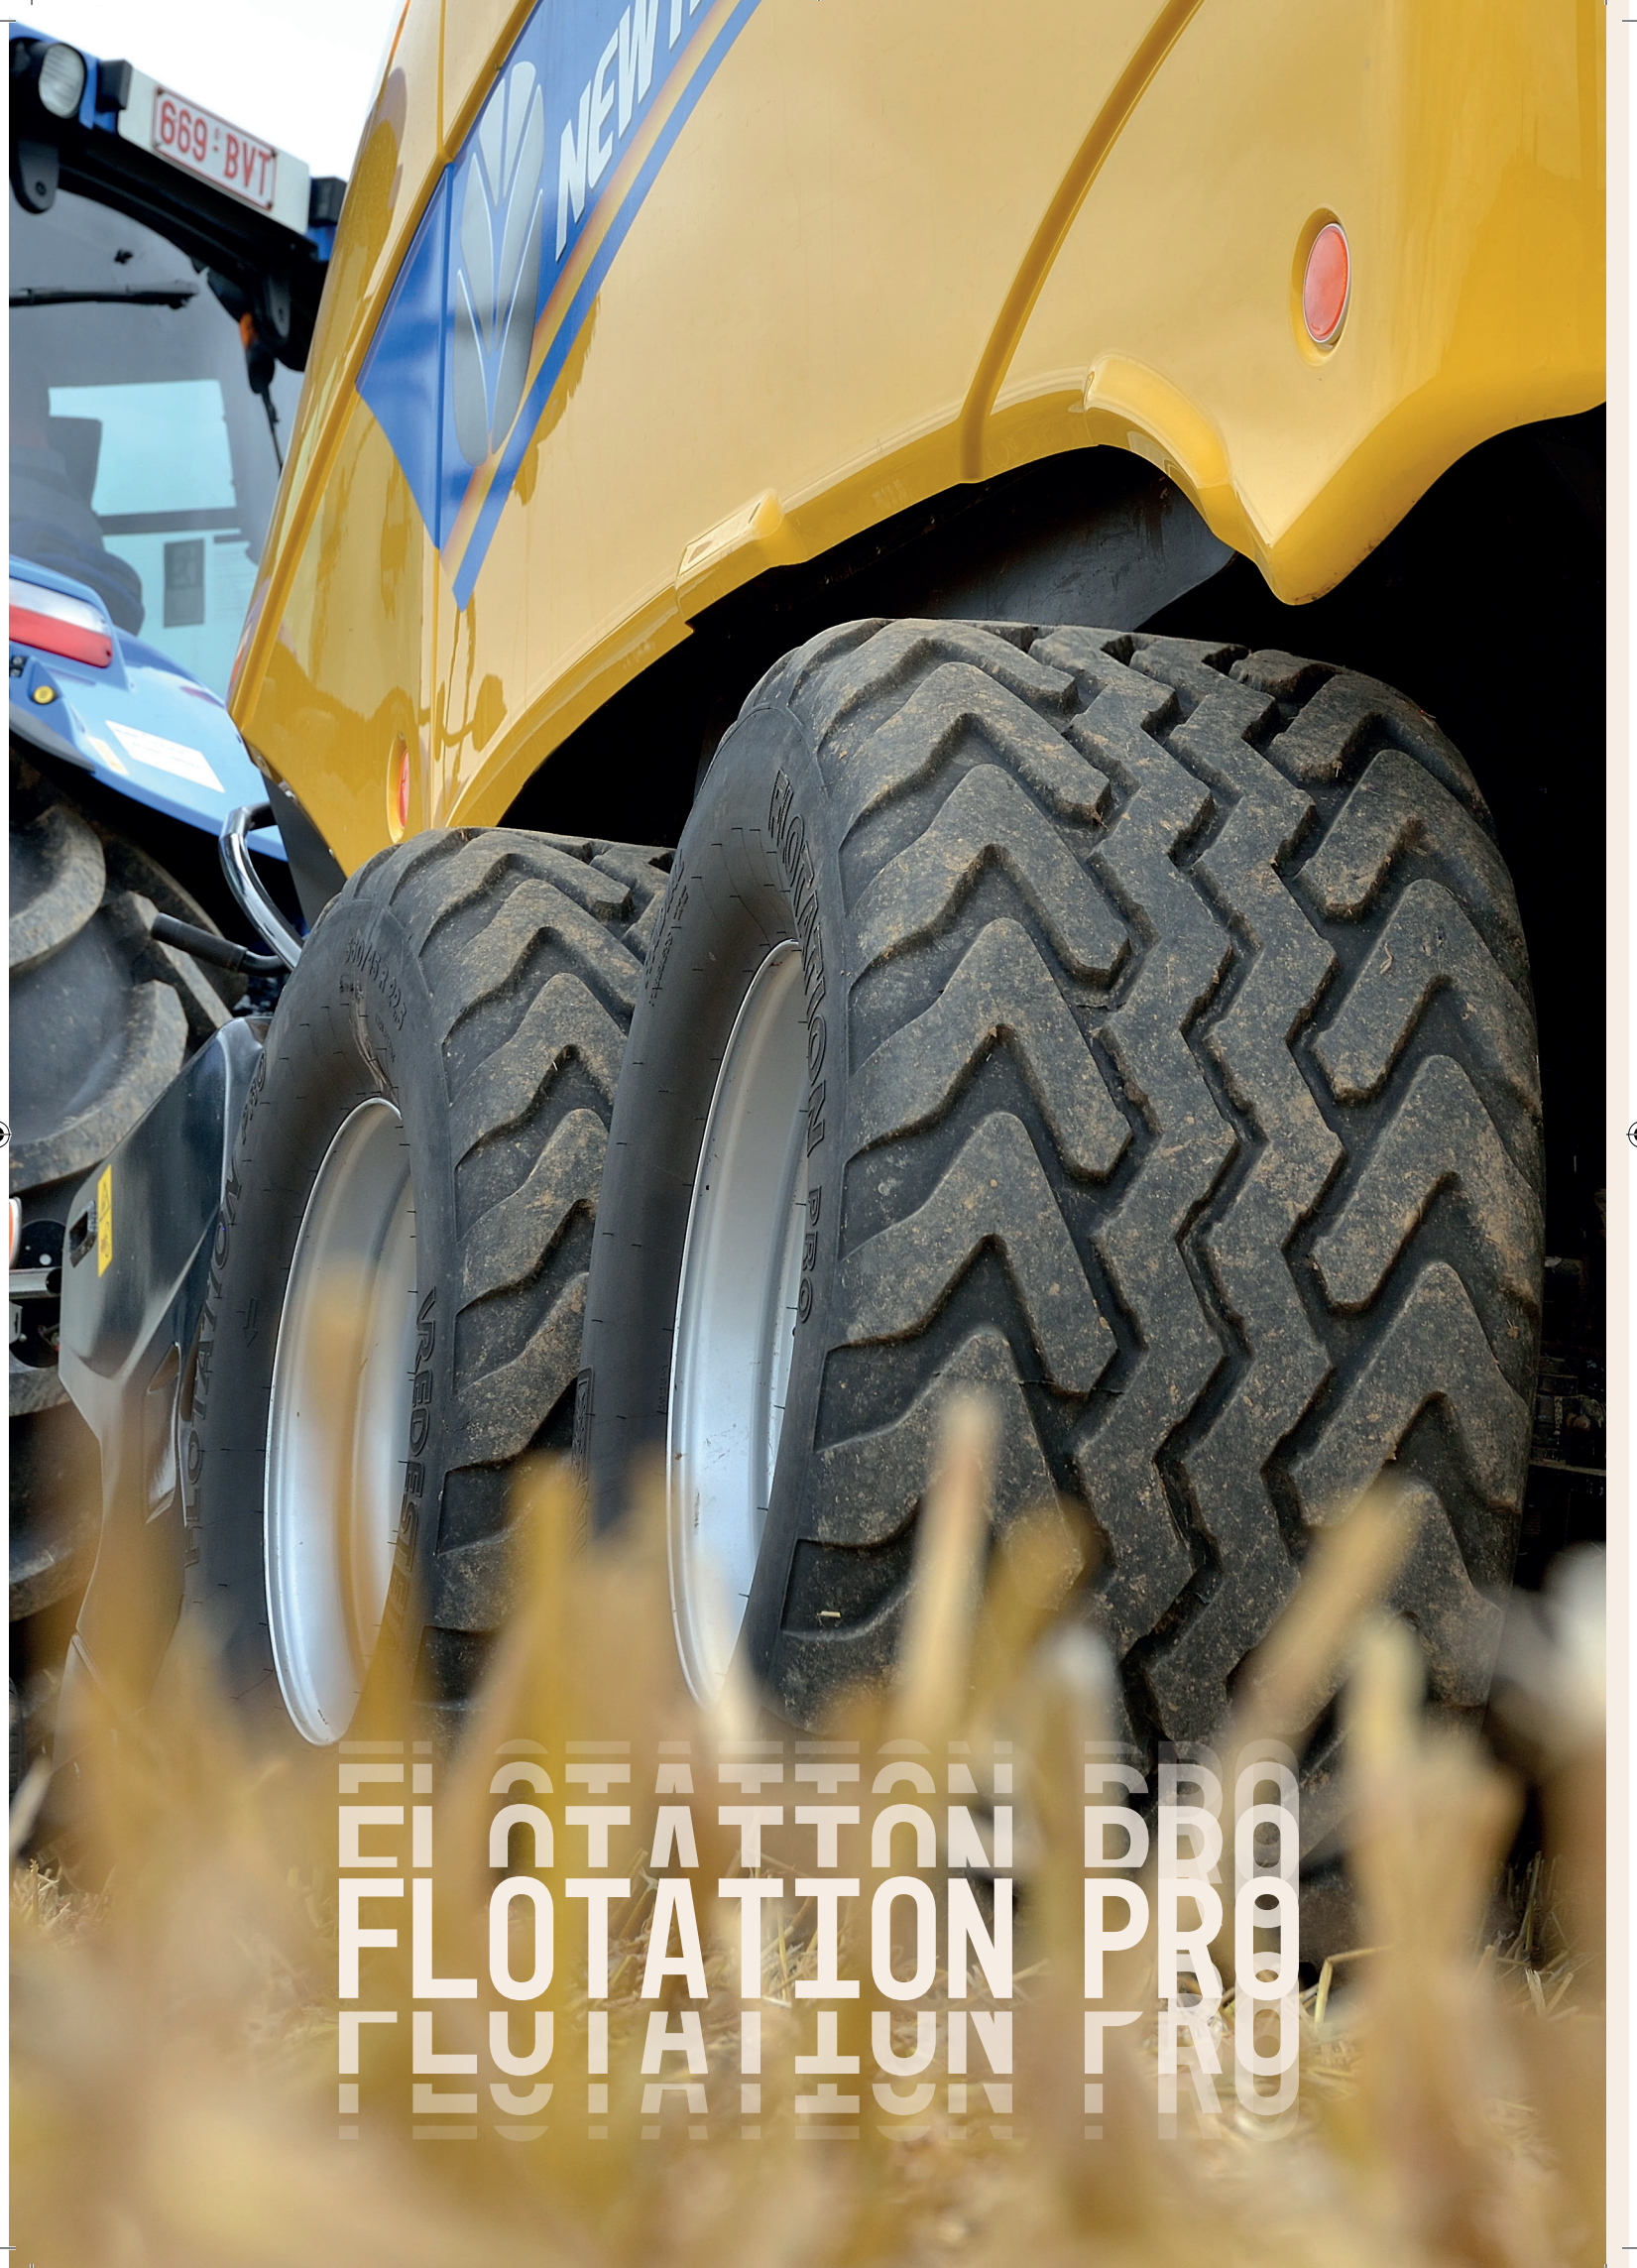

FLOTTATION PRO
FLOTTATION PRO
FLOTTATION PRO

MEETS THE HIGH DEMANDS OF PROFESSIONALS



FLOTATION ^{PRO}

FEATURES

- High rubber content in profile
- Flexible and strong carcass
- Flat contour & rounded shoulders

BENEFITS

- Minimal rutting, long lifespan
- Good flotation properties, high comfort level
- No damage to vulnerable crops

Ø	TT/TL	Service description	bar							
						mm	mm	mm	mm	
		560/45 R 22.5 IMP	TL	146 D	3,2	AG 16.00	545	1085	490	3295
		560/45 R 22.5 IMP	TL	152 D	4,0	AG 16.00	545	1085	490	3295
		560/60 R 22.5 IMP	TL	155 D	3,2	AG 16.00	565	1250	560	3850
		560/60 R 22.5 IMP	TL	161 D	4,0	AG 16.00	565	1250	560	3850
		560/60 R 22.5 IMP	TL	165 D	5,0	AG 16.00	565	1250	560	3850
		620/40 R 22.5 IMP	TL	148 D	3,2	AG 20.00	610	1080	495	3330
22,5		620/40 R 22.5 IMP	TL	154 D	4,0	AG 20.00	610	1080	495	3330
		620/50 R 22.5 IMP	TL	154 D	3,2	AG 20.00	610	1185	540	3640
		620/50 R 22.5 IMP	TL	161 D	4,0	AG 20.00	610	1185	540	3640
		650/50 R 22.5 IMP	TL	157 D	3,2	AG 20.00	645	1250	560	3850
		650/50 R 22.5 IMP	TL	163 D	4,0	AG 20.00	645	1250	560	3850
		710/40 R 22.5 IMP	TL	155 D	3,2	AG 24.00	705	1140	520	3520
		710/40 R 22.5 IMP	TL	161 D	4,0	AG 24.00	705	1140	520	3520
		620/55 R 26.5 IMP	TL	166 D	4,0	AG 20.00	625	1360	620	4200
26,5		710/50 R 26.5 IMP	TL	170 D	4,0	AG 24.00	710	1360	620	4200
		800/45 R 26.5 IMP	TL	174 D	4,0	AG 28.00	800	1370	625	4200

• The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.
 • Subject to changes in specifications.

FLOTATION FLOTATION+ FLUENT



IDEAL FOR HEAVY DUTY WORK



FLOTATION+

FEATURES

- Sophisticated carcass construction
- Large contact area
- Good height/width ratio

BENEFITS

- High load capacity
- Minimal soil compaction
- Exceptional stability

Ø	TT/TL	Service description	bar							
				mm	mm	mm	mm	mm	mm	
15,3		260/70 - 15.3 IMP	TL	122 A8	3,2	9.00	270	755	345	2280
		260/70 - 15.3 IMP	TL	126 A8	3,6	9.00	270	755	345	2280
		260/70 - 15.3 IMP	TL	131 A8	5,0	9.00	270	755	345	2280
		300/80 - 15.3 IMP	TL	132 A8	2,8	9.00	295	865	385	2575
		300/80 - 15.3 IMP	TL	138 A8	3,6	9.00	295	865	385	2575
		300/80 - 15.3 IMP	TL	141 A8	4,0	9.00	295	865	385	2575
15,5		400/60 - 15.5 IMP	TL	145 A8	3,6	AG 13.00	410	850	380	2530
17		340/55 - 16 IMP	TL	133 A8	3,2	11	345	780	365	2360
		380/55 - 17 IMP	TL	133 A8	2,4	13.00	380	845	385	2530
		380/55 - 17 IMP	TL	138 A8	2,8	13.00	380	845	385	2530
		480/45 - 17 IMP	TL	140 A8	2,4	16.00	480	860	400	2565
		480/45 - 17 IMP	TL	146 A8	3,2	16.00	480	860	400	2565
		500/50 - 17 IMP	TL	140 A8	2,0	16.00	500	950	430	2890
		500/50 - 17 IMP	TL	149 A8	2,8	16.00	500	950	430	2890
	20		400/70 - 20 IMP	TL	150 A8	2,8	14	420	1080	485
		460/65 - 20 IMP	TL	155 A8	2,8	14	460	1100	485	3300
		500/55 - 20 IMP	TL	150 A8	2,4	16.00	515	1060	475	3160
22,5		560/60 - 22.5 IMP	TL	167 A8	2,8	AG 16.00	565	1240	550	3700
		600/55 - 22.5 IMP	TL	168 A8	2,8	AG 20.00	625	1230	550	3700
		710/45 - 22.5 IMP	TL	171 A8	2,8	AG 24.00	730	1240	550	3700

• The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.
 • Subject to changes in specifications.

FOR GRASSLAND — & ARABLE MACHINES









AW

FEATURES

- Strong, flexible nylon carcass
- Longitudinal tread profile
- Genuine tread width

BENEFITS

- High load capacity at low inflation pressure
- Good sideways stability
- Reduced damage to the soil

Ø	TT/TL	Service description	bar						
				mm	mm	mm	mm	mm	mm
12	7.00 - 12 IMP	TT	2,50	4.25	200	705	315	2050	
	10.0/80 - 12 IMP	TL	116 A8	3,10	7.00	265	725	330	2185
15,3	10.0/75 - 15.3 IMP	TL	123 A8	3,90	9.00	270	775	355	2335
	10.0/75 - 15.3 IMP	TL	130 A8	5,50	9.00	270	775	355	2335
	11.5/80 - 15.3 IMP	TL	131 A8	3,40	9.00	310	850	385	2560
	11.5/80 - 15.3 IMP	TL	139 A8	4,75	9.00	310	850	385	2560
	12.5/80 - 15.3 IMP	TL	142 A8	4,30	9.00	320	885	405	2660
	16	13.0/75 - 16 IMP	TL	135 A8	3,00	11	345	905	405
430,9	13.5/75 - 430.9 IMP	TL	145 A8	4,00	11	360	960	435	2900
	15.0/55 - 17 IMP	TL	134 A8	2,60	13.00	385	865	390	2580
17	19.0/45 - 17 IMP	TL	138 A8	2,00	16.00	455	870	400	2620
	500/50 - 17 IMP	TL	140 A8	2,00	16.00	500	950	430	2890
18	12.5/80 - 18 IMP	TL	142 A8	3,70	11	340	975	450	2985
	15.0/70 - 18 IMP	TL	151 A8	4,25	13	395	1000	460	3030

• The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.
• Subject to changes in specifications.

COMFORT AND TRACTION ASSURED









AS+

FEATURES

- Sturdy diagonal carcass construction
- Special tread
- Large cleat surface

BENEFITS

- Excellent stability and high load capacity
- High traction power
- Long lifespan







Ø		TT/TL	Service description	bar						
					mm	mm	mm	mm	mm	mm
12	7.00 - 12 IMP	TL	95 A8	2,5	4.25	190	690	325	2100	
15,3	10.0/75 - 15.3 IMP	TL	123 A8	3,9	9.00	270	790	365	2420	
	11.5/80 - 15.3 IMP	TL	135 A8	4,1	9.00	305	890	400	2695	
17	15.0/55 - 17 IMP	TL	134 A8	2,6	13.00	370	890	400	2680	

• The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.
• Subject to changes in specifications.

FOR PROFESSIONAL CULTIVATION MACHINERY



V61

Ø		TT/TL	Service description	bar						
					mm	mm	mm	mm	mm	mm
14,5	200/60 - 14.5 IMP	TL	106 A8	5,0	AG 6.75	210	615	295	1880	
	250/65 - 14.5 IMP	TL	121 A8	3,6	AG 8.00	245	680	320	2060	



V64+

V64+

PIRELLI

170/60 R38

K8807350

10-9000

22225

125 daNm
92 ft.lbs
0527 8400 8





V50


V60

V64

V64+

V67

**V50 • DESIGNED AS FURROW WHEEL ON PLOUGHS | V60 • THE TIRE FOR GRASSLAND & HORTICULTURE
V64/V64+ • THE STANDARD FOR EFFICIENT HAY MAKING AND GRASS MACHINERY | V67 • THE IDEAL
TRACTION TIRE FOR MARKET GARDENING AND CONSOLIDATION WHEELS FOR SEED DRILLS**



Ø		TT/TL	PR	Service description	bar		mm	mm
V50	5.00 - 8	TT	10 PR	66 A6	6,00	3.00D	130	455
V50	6.00 - 9	TT	10 PR	94 A6	5,00	4.00 E	165	445
V60	3.00 - 4	TT	4 PR	30 A6	3,50	2.10	90	275
V60	4.00 - 4	TT	4 PR	43 A6	2,75	2.10	100	315
V60	3.50 - 6	TT	4 PR	45 A6	3,00	2.50A	100	355
V60	3.50 - 8	TT	4 PR	52 A6	3,00	2.50A	100	395
V60	4.00 - 8	TT	4 PR	57 A6	2,75	2.50A	105	425
V61	15x 6.00 - 6	TT	4 PR	61 A6	2,50	4.50A	160	380
V61	170/60 - 8	TT	6 PR	71 A6	3,00	5.50 A	170	425
V61	18x 8.50 - 8	TT	4 PR	77 A6	2,00	7.00 I	210	465
V61	18x 8.50 - 8	TL	6 PR	85 A6	3,00	7.00 I	210	465
V64	3.50 - 6	TT	4 PR	45 A6	3,00	2.50A	100	355
V64+	160/65 - 6	TT		60 A8	2,40	4.50A	160	365
V64+	160/65 - 6	TT		66 A8	3,20	4.50A	160	365
V64	3.50 - 8	TT	4 PR	52 A6	3,00	2.50A	100	395
V64+	170/60 - 8	TT		65 A8	2,40	5.50 A	170	410
V64+	170/60 - 8	TT		71 A8	3,20	5.50 A	170	410
V64+	210/60 - 8	TT		83 A8	3,20	7.00 I	215	455
V67	3.00 - 4	TT	4 PR	30 A6	3,50	2.10	90	275
V67	4.00 - 4	TT	4 PR	43 A6	5,00	2.50 C x 4	110	305
V67	3.50 - 6	TT	4 PR	45 A6	3,00	2.50A	100	355
V67	3.50 - 8	TT	4 PR	52 A6	3,00	2.50A	100	395
V67	4.00 - 8	TT	4 PR	57 A6	2,75	2.50A	105	425
V67	4.00 - 12	TT	4 PR	66 A6	2,75	3.00 D	110	515

• The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.
• Subject to changes in specifications.

FLOTATION IN ACTION



FLOTATION TRAC
FLOTATION TRAC
FLOTATION TRAC

VREDESTEIN
TIRES





VREDESTEIN
TIRES

APOLLO TIRES (US) INC. | +1 (770) 302 2163 | customer.us@apolloytyres.com | www.vredestein.com