



# AGRI LOADER — TIRES



**VREDESTEIN**  
TIRES



**MORE HOURS  
— ALWAYS**

**VREDESTEIN**  
TIRES

# THE RADIAL AGRI-LOADER TIRES FOR TELEHANDLERS AND COMPACT WHEEL LOADERS

The diversity of agri-loader equipment and the many different surface conditions they face makes selecting the right tire a difficult choice. As tires largely determine the performance of the equipment and therefore the eventual ROI, cost-conscious businesses apply stringent requirements to their tires.

## TRAXION VERSA SOFT SOIL



With its successful Traxion tread, Vredestein has earned an excellent reputation in terms of low costs per operational hour. This was the starting point for the Vredestein Traxion Versa. The tire represents an ideal solution for machines requiring good traction in soft ground conditions as well as comfort and wear resistance on harder surfaces.

## ENDURION HARD SURFACE



The Vredestein Endurion is the champion on hard surfaces. Its extra strong carcass and robust tread offer maximal radial and lateral stability, optimal comfort and exceptionally long lifespan. It is the ideal solution for a large range of agri-industrial equipment that is mainly used on hard surfaces.



# TRAXION VERSA DETAILS

**TRAXION** *VERSA*



■ Comfort zone:  
lug in the centre in driving  
direction for comfort and  
wear resistance.

■ Traction zone:  
lug in the shoulder  
transverse to driving  
direction for traction.

## STABILIZER RING

increased lug support in the  
centre of the tire for added  
stability.

widened lug in  
the centre for  
added stability

self cleaning  
through unique  
non parallel lugs

sidewall  
protector

lug to open  
space ratio:  
30% for optimal  
combination of  
traction and  
wear resistance

rim  
protector




# ENDURION DETAILS

**ENDURION**



## STABILIZER RING

increased lug support in the centre of the tire for maximum stability.

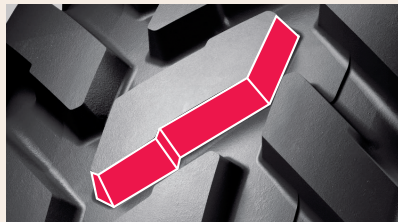

lug support in all directions for stability and comfort

lug to open space ratio: 44% for optimal wear resistance and stability



sidewall protector

rim protector



## TRAXION VERSA | SOFT SOIL



Ø		TT/TL	Service description	bar		mm	mm	mm	mm
18	340/80 R 18 IND TL	TL	143 A8/B	4,0	11	355	1000	455	3000
20	400/70 R 20 IND TL	TL	149 A8/B	4,0	13	405	1075	475	3250
	400/70 R 24 IND TL	TL	152 A8/B	4,0	13	405	1170	535	3510
24	400/80 R 24 IND TL	TL	162 A8/B	5,0	DW13	405	1240	570	3740
	460/70 R 24 IND TL	TL	159 A8/B	4,0	DW15L	480	1255	570	3800
	500/70 R 24 IND TL	TL	164 A8/B	4,0	DW16L	515	1320	595	4020
26	480/80 R 26 IND TL	TL	160 A8/B	3,2	DW15L	495	1440	645	4320
28	440/80 R 28 IND TL	TL	156 A8/B	4,0	DW14L	450	1415	640	4270



## ENDURION | HARD SURFACE



Ø		TT/TL	Service description	bar		mm	mm	mm	mm
18	340/80 R 18 IND	TL	143 A8/B	4,0	11	355	1000	460	3000
	400/70 R 18 IND	TL	147 A8/B	4,0	13	410	1015	465	3050
20	340/80 R 20 IND	TL	144 A8/B	4,0	11	355	1055	490	3180
	400/70 R 20 IND	TL	149 A8/B	4,0	13	405	1070	490	3245
	400/70 R 24 IND	TL	152 A8/B	4,0	13	405	1170	540	3510
24	400/80 R 24 IND	TL	162 A8/B	5,0	DW13	410	1245	570	3720
	460/70 R 24 IND	TL	159 A8/B	4,0	DW15L	480	1265	570	3820
	500/70 R 24 IND	TL	164 A8/B	4,0	DW16L	520	1315	595	4000
26	480/80 R 26 IND	TL	160 A8/B	3,2	DW15L	495	1440	645	4320
28	440/80 R 28 IND	TL	156 A8/B	3,2	DW14L	455	1420	640	4290

· The dimensions indicated, which apply to a nominal tire pressure, may vary in practice under the influence of actual tire pressure and conditions of use.  
 · Subject to changes in specifications.

**VREDESTEIN**  
TIRES

# TRAXION IN ACTION



**MR. SCHRÖDER | GERMANY**



“The Endurion tires prove to be extremely robust.”

**ENDURION**

**ETA SAFFRAY | FRANCE**



“I like the Versa’s Traxion for manure activities, but also for its self cleaning ability and especially its lifespan.”

**TRAXION<sup>VERSA</sup>**



**ETA CREPEL | FRANCE**



“I am amazed by the stability of the Endurion tire for activities with the boom extended but also its lifespan on hard surfaces.”

**ENDURION**



**VREDESTEIN**  
TIRES

APOLLO TYRES EXPORT | +31 (0)53 4888 400 | [export@apolloytyres.com](mailto:export@apolloytyres.com) | [www.vredestein.com](http://www.vredestein.com)

APOLLO TYRES (UK) HOLDINGS LTD | +44 (0)330 333 1294 | [customer.uk@apolloytyres.com](mailto:customer.uk@apolloytyres.com) | [www.vredestein.co.uk/agriculture](http://www.vredestein.co.uk/agriculture)

APOLLO TIRES (US) INC. | 1 732 549 2440 / 800 221 3422 | [customer.us@apolloytyres.com](mailto:customer.us@apolloytyres.com) | [www.vredestein.com](http://www.vredestein.com)